

PAD LENGHT DETERMINED BY SWIM SPA REQUIREMENTS

24"
[61 CM]
CLEARANCE

117'
[297.2 CM]
PAD MINIMUM

7"
[17.8 CM]
DECK HOLE

10.25"
[26 CM]
DECK HOLE

6.5"
[16.5 CM]
POST

MOTOR

9.75"
[24.8 CM]
POST

0.25"
[0.6 CM]
MINIMUM
CLEARANCE
TYP.

SWIM SPA

98.75"
[250.8 CM]
BETWEEN POSTS

97.25"
[247 CM]
COVER

CONCRETE PAD (GREY LINE)

DECK HOLE

POST


MOTOR

84.875"
[215.6 CM]
BETWEEN POSTS

COVER (DASHED LINE)

18"
[45.7 CM]
CLEARANCE

Service access required for **BOTH** side of swim spa.
 Dimensions do not include required access for swim spa.
 Do not scale drawing.
 Dimensions are in inches [cm].

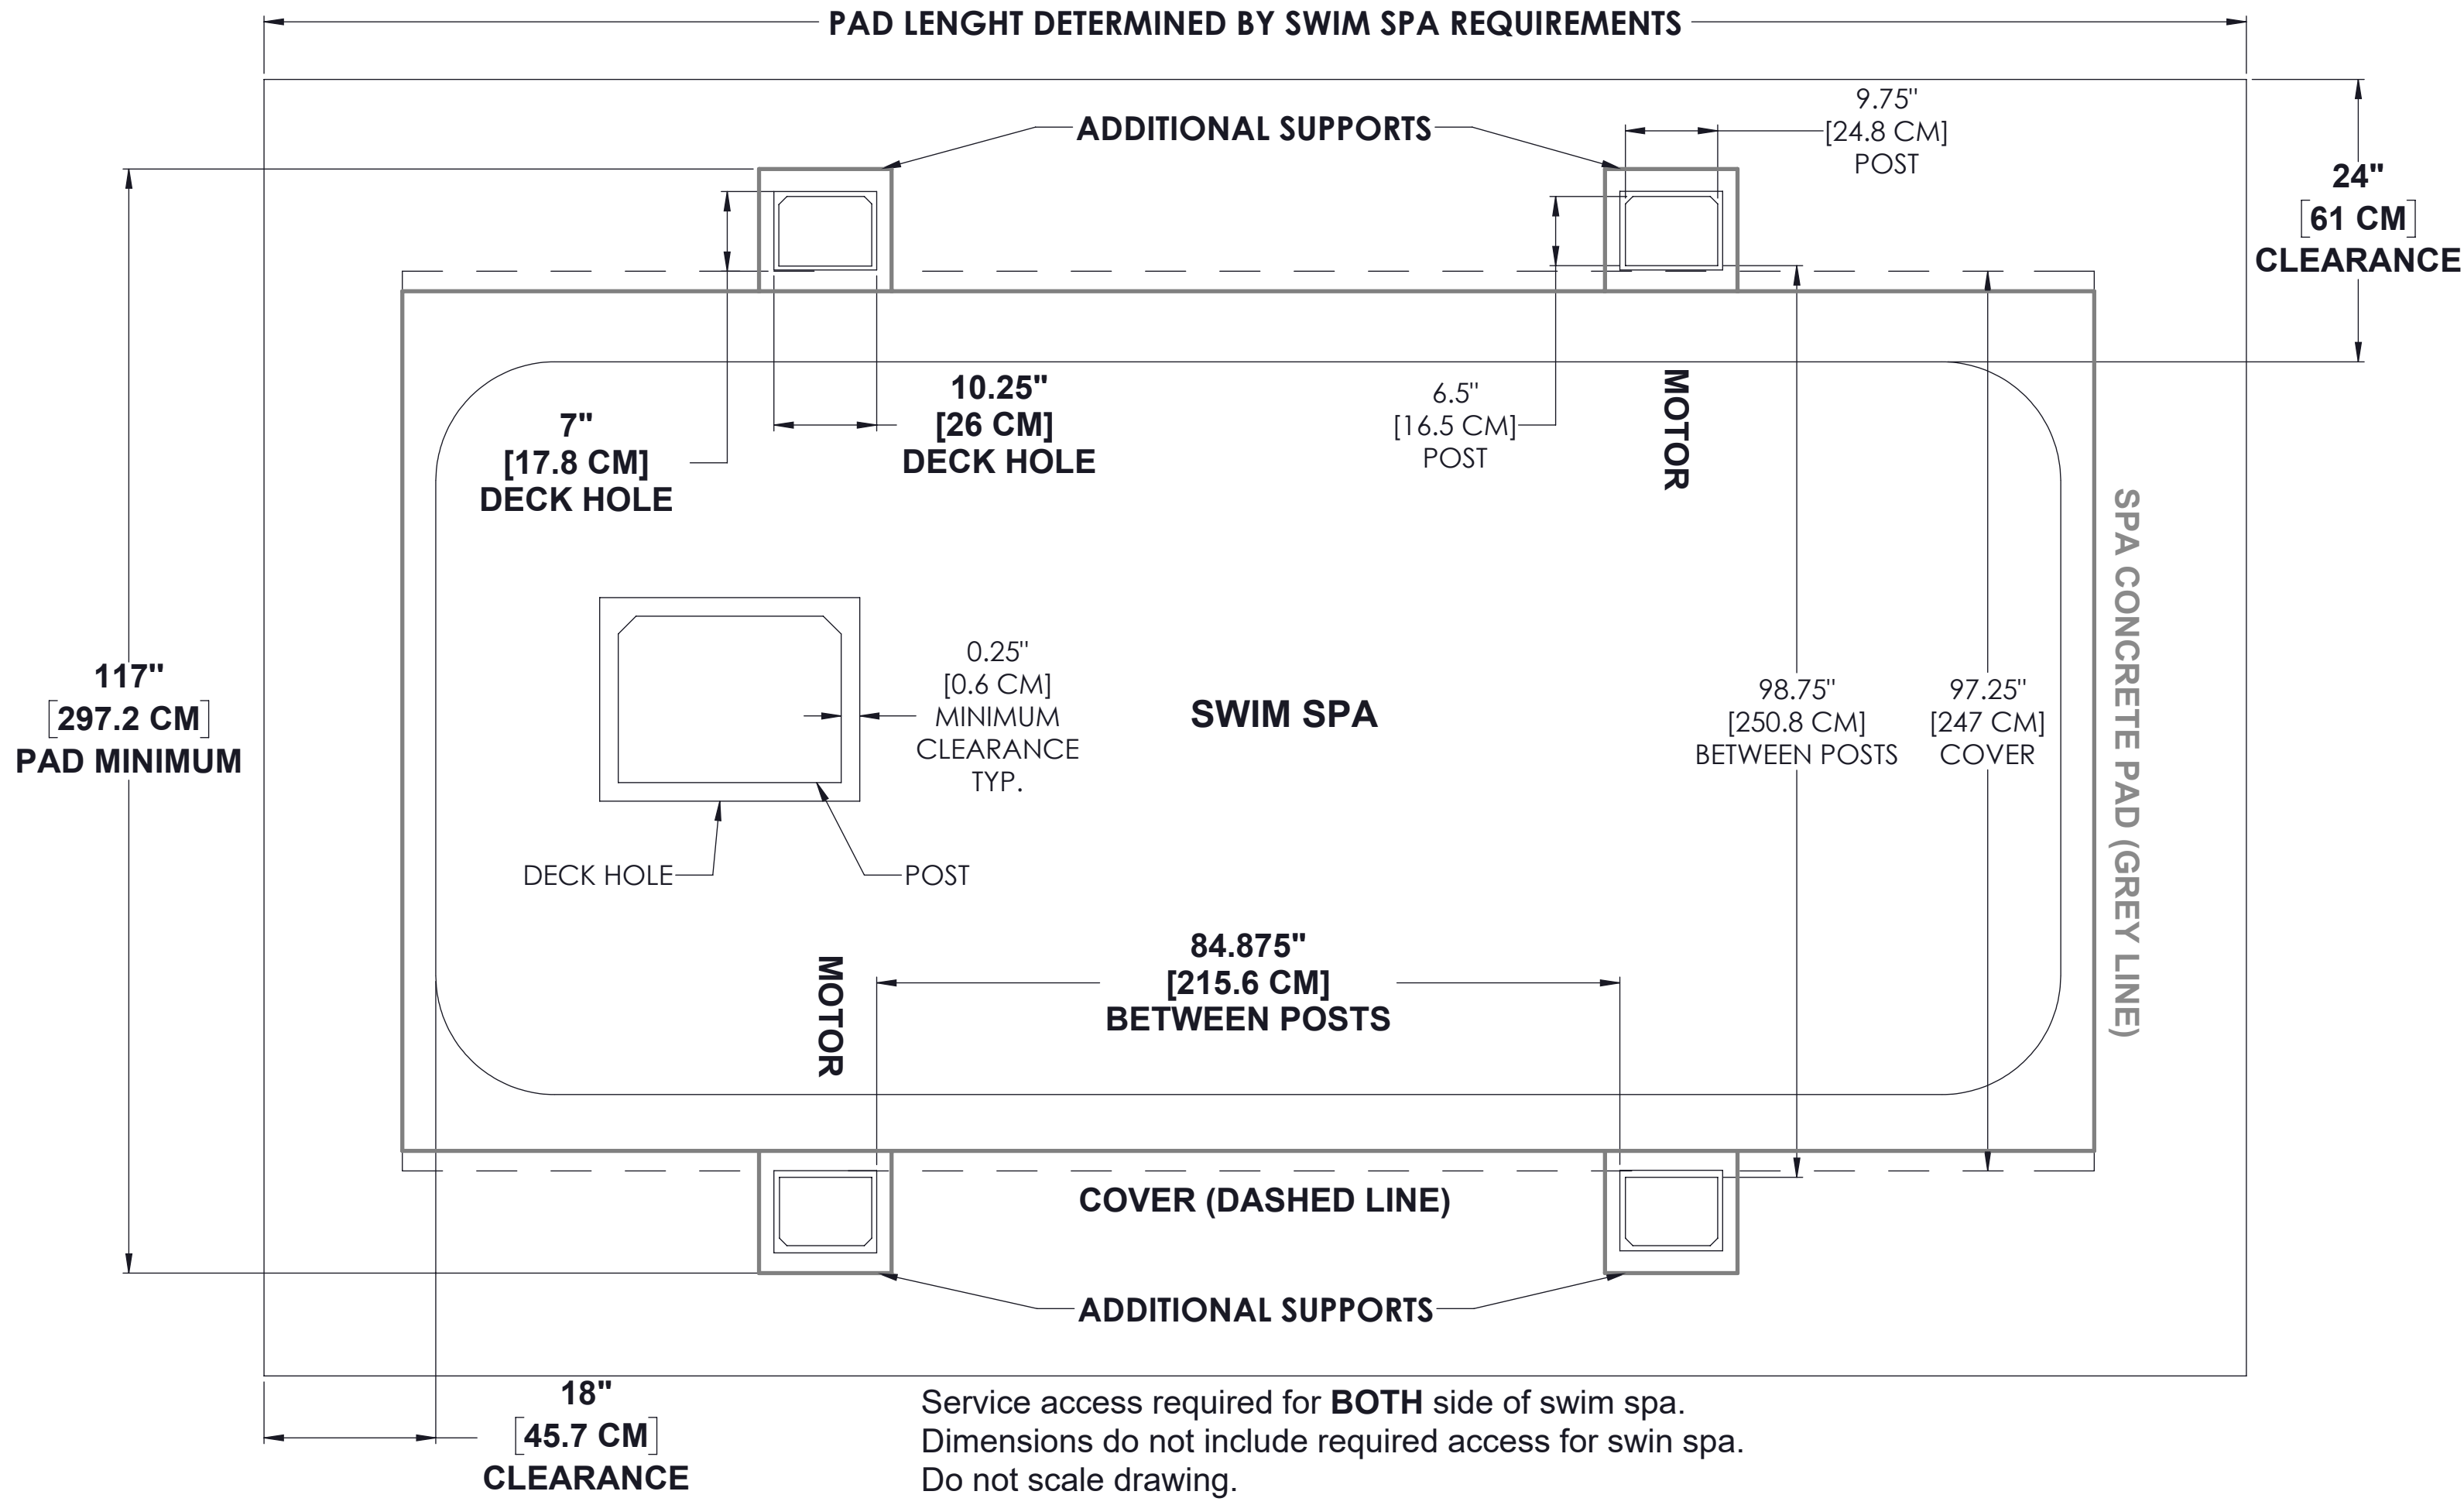

Service access required for **BOTH** side of swim spa.
 Dimensions do not include required access for swim spa.
 Do not scale drawing.
 Dimensions are in inches [cm].